


Positioning Systems

MPS Automatic Pushing System

The universal horizontal MPS Powerpushing system is available with an accuracy of $\pm 0,25$ and $\pm 0,1$ mm, suitable for light to heavy duty work. Material is clamped in the gripper jaws and fully automatically pushed.

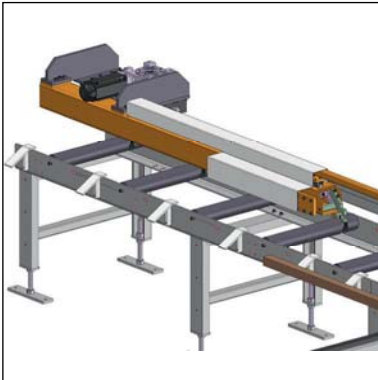

Type	Powerpusher	Powerpusher 200M	Powerpusher HD
Measure readout	0,1 mm	0,1 mm	0,1 mm
Accuracy	$\pm 0,25$ mm	$\pm 0,1$ mm	$\pm 0,25$ mm
Max. load	± 2000 N.	± 2000 N.	± 5000 N.
Block	Electric hold	Electric hold	Electric hold
Positioning speed	40 mtr/min	40 mtr/min	30 mtr/min
Available lengths	2 ~ 14 mtr	2 ~ 14 mtr	2 ~ 18 mtr
Application	Light and medium metal- and aluminium	Light and medium metal- and aluminium	Heavy duty

Highlighted options



Support control panel



Transverse transport infeed or outfeed



Machine interface (MPS control)

Other options

- Safety fencing
- USB interface
- Many versions available for different materials

De Tollenaere NV
Ringlaan 9, 9900 Eeklo
Tel: 09/377.29.49

info@detollenaere.be
www.detollenaere.eu

 **De Tollenaere.eu**
machinery **PLUS!**